



Capestone SQUARE FIRE PIT

Outdoor Living!



Nothing compares with the simple, timeless appeal of a fire pit, whether it's a gathering place for family and friends or a calming outdoor haven at the end of a hectic day. A Capestone fire pit kit will be a great weekend project that will bring the best of memories to you and your family.

Capestone

SQUARE FIRE PIT

Installation

Step 1 | Foundation


Place and compact a level base with gravel extended beyond the Capestone wall units by at least 4 inches. The surface of the leveling pad should extend below grade by 2 inches. If you are using a concrete paver base, place Capestone units directly onto the base. Fill the bottom with 2-4 inches of sand for drainage.

Step 2 | Install Base Course

Lay out the Capestone fire pit in a square design with an inside diameter dimension of 28". Use 12 units per layer. Adjustments to the circle of units may be necessary to ensure alignment as the unit should fit tightly together. Ensure the first layer is level front-to-back and side-to-side.

Step 3 | Install Additional Layers

Apply a bead of exterior grade construction adhesive to the base layer of units. The second course units should be centered over the two units below to establish a running bond. Continue building courses 3 and 4 in the same manner.

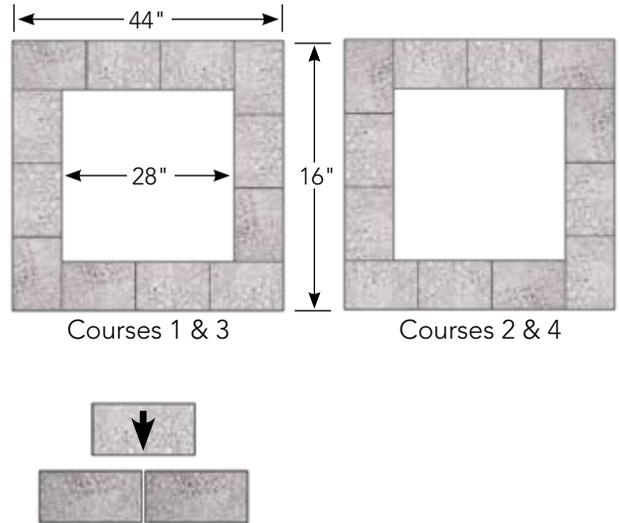

Capestone Fire Pit



Wall Unit



28" Steel Insert/2" Flange

Available Colors



Granite Blend



Tan/Charcoal

Specifications

Product	Height	Width	Depth	Weight	Units/Kit
Wall Unit	4"	12"	8"	30 lbs	48

Dimensions	Kit Includes:
16" High, Inside Diameter - 28" Outside Diameter - 44"	48 Capestone Wall Units (4 courses, 12 units per course), 28" Steel Insert, 2" Flange

Important Note: Burning large items or trash in fire pits may cause damage to the Capestone units. Our fire features are designed strictly for small fires. Hi-Way recommends a steel insert to protect units and will not be held liable for damage to the fire pit or coping if an insert is not used.

Distributed by:



2746 Cranberry Hwy
Wareham, MA 02571
508-295-0834 (Phone)
508-291-2852 (Fax)
www.hiwayconcrete.com